


Hassco

# Vacuum Monitored Utility Tanks Double-Wall

1. Lockable Overfill Box c/w fill
2. 2" Threaded Fitting
3. Lift Lug
4. ULC Label
5. Emergency Vent
6. 1" Bottom Outlet
7. Legs
8. Vacuum Gauge
9. Emergency Vent (interstice)

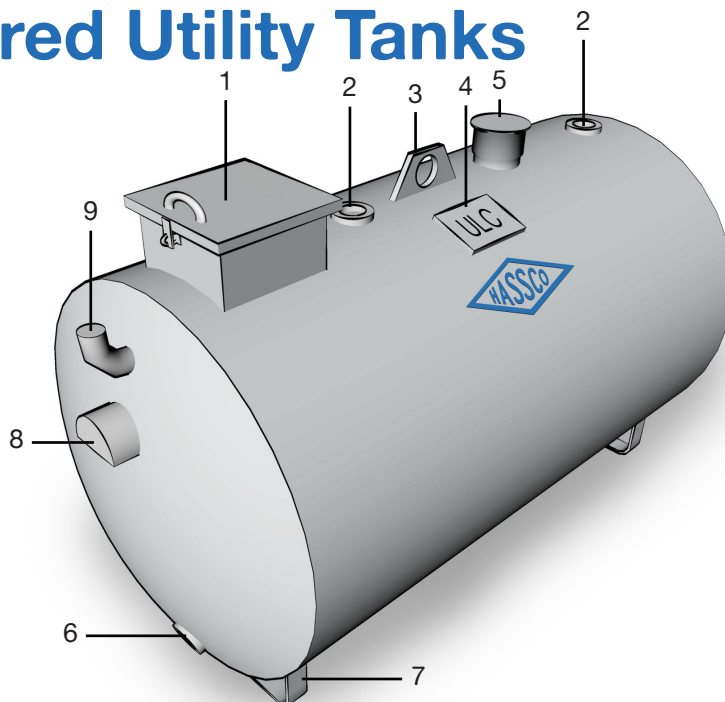

Material (gauge)	Capacity	Diameter	Length	Weight
12	450L/100G	30"	48"	450lbs.
12	1100L/250G	38"	60"	700lbs.
12	1360L/300G	38"	72"	750lbs.
12	2200L/500G	50"	72"	1070lbs.
12	4500L/1000G	50"	144"	1980lbs.

## General Information

HASSCO's Double-Wall tanks are an industry proven, cost effective way to store various fresh fuels. Best suited for farm and construction applications, these tanks come with 4 threaded openings, a fill cap, emergency/normal venting and a lockable spill-box incorporated into the design of the tank. Our Double-Wall tanks come standard with a 340 degree wrap and is continually monitored by a vacuum gauge installed on the tank. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint. Other coating options such as epoxy and powder coatings are available upon request.

## Options

- Tank gauges, alarms, heaters and pumping systems
- Powder Coating
- Interior linings
- Available in custom sizes and configurations

## Sizing

- Up to 4500L/1000G

## Conformity

- ULC S601

