


Hassco

Rectangular Mobile IBC

1. Handles
2. 2" Pump Outlet c/w Support Plate
3. Emergency Vent
4. UN/CGSB Label
5. 2" Fill c/w Lockable Vented Cap
6. Bolt Down Lugs
7. Skid Frame (on 680L and up)

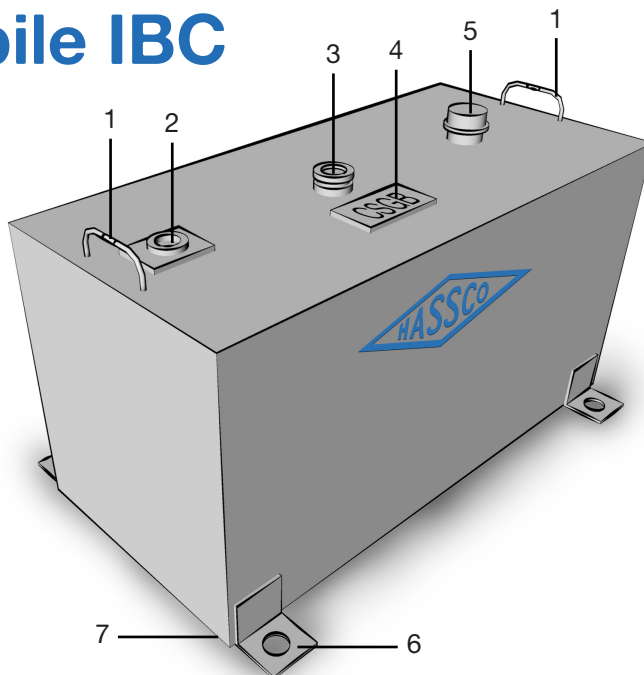

| Material (gauge) | Capacity | Height | Length | Width | Weight |
|------------------|-------------|--------|--------|-------|----------|
| 11 | 225L/50G | 24" | 24" | 24" | 115lbs. |
| 11 | 450L/99G | 24" | 48" | 24" | 215lbs. |
| 3/16" | 680L/150G | 24" | 60" | 30" | 440lbs. |
| 3/16" | 900L/200G | 31" | 60" | 31" | 530lbs. |
| 3/16" | 1100L/250G | 34" | 60" | 34" | 620lbs. |
| 3/16" | 1360L/300G | 34" | 70" | 34" | 750lbs. |
| 3/16" | 2200L/500G | 40" | 72" | 50" | 1100lbs. |
| 1/4" | 4500L/1000G | 48" | 96" | 60" | 2300lbs. |

General Information

HASSCO's CGSB approved mobile IBCs are built tough to withstand the rigours of transporting fuel to any off-road/on-road location. All tanks come with a CGSB approved vented fill cap, emergency vent, internal baffles and reinforced pump mounts. These tanks are best suited for applications requiring the transfer of flammable fuels. All HASSCO tanks are phosphate washed prior to applying a high build metal treatment and two top coats of enviro-smart water based paint. Other coating options such as epoxy and powder are available upon request.

Options

- Double-Wall version
- Transfer pumps and meters
- Powder Coating

Sizing

- Up to 4500L

Conformity

- Transport Canada\CGSB

