


Hassco

# Larger Aboveground Tanks Double Wall

1. Lockable Spillbox
2. 2" Threaded Fitting
3. Lift Lug
4. ULC Label
5. Emergency Vent
6. 4" Threaded Fitting
7. 3" Threaded Fitting
8. Full Length Frame (optional)
9. Stairs & Platform
10. Post Beam Supports
11. Vacuum Gauge
12. Emergency Vent (interstice)

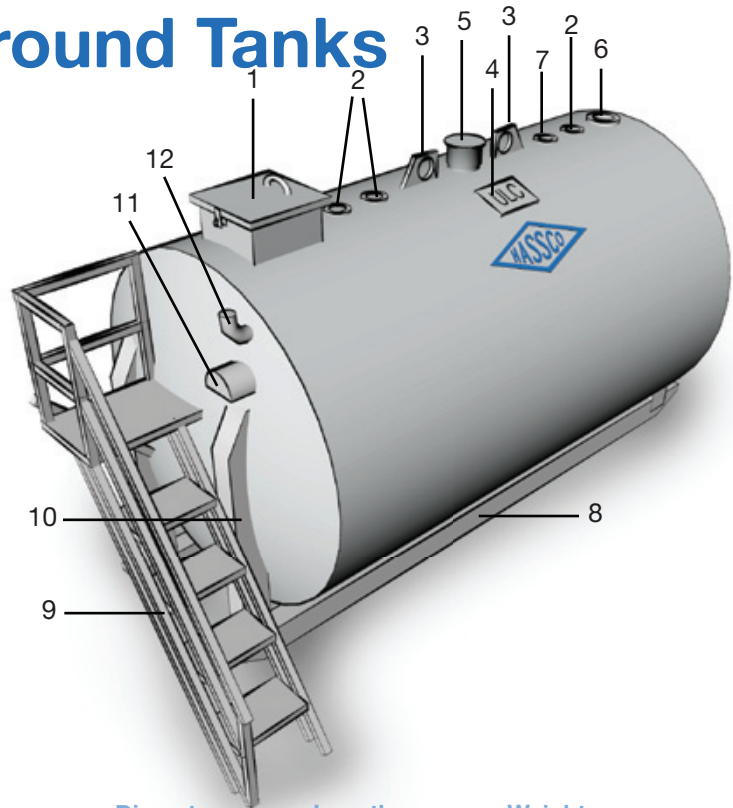

Material	Capacity	Diameter	Length	Weight
3/16"	9000L (2000gal)	72"	137"	4400lbs.
3/16"	13600L (3000gal)	72"	205"	6000lbs.
3/16"	18000L (4000gal)	84"	201"	8000lbs.
3/16"	22700L (5000gal)	84"	251"	9000lbs.
3/16"	25000L (5500gal)	99"	201"	9500lbs.
3/16"	35000L (7700gal)	99"	281"	11500lbs.
3/16"	45400L (10000gal)	99"	374"	14500lbs.
3/16"	50000L (11000gal)	99"	402"	16000lbs.

## General Information

HASSCO's aboveground storage tanks are manufactured with 100% Canadian hot rolled steel & meets or exceeds ULC specifications. Our vacuum monitored tanks will provide safe fuel containment for years to come. Tanks include standard post beam supports with stairs & platform. Emergency venting, spillbox, fill cap & vacuum gauges are all standard. Available in single wall or double wall configurations. Double wall tanks successfully comply with secondary containment requirements therefore removing the need of dyking systems. Coating: sandblasted prior to applying epoxy primer coat & 2 coats primer urethane finish.

## Options

- Tank gauges, alarms, liners, heaters, and pumping & card-lock systems
- Vehicle barrier systems and catwalks
- Customized to your specifications as needed
- Double wall wraps of 340° or 360°
- Single wall available

## Sizing

- Up to 75000L

## Conformity

- ULC

