


Hassco

Double Wall Utility Tanks

1. Lockable Spillbox
2. 2" Threaded Fitting
3. Lift Lug
4. ULC Label
5. Emergency Vent
6. 1" Bottom Outlet
7. Legs
8. Vacuum Gauge
9. Emergency Vent (interstice)

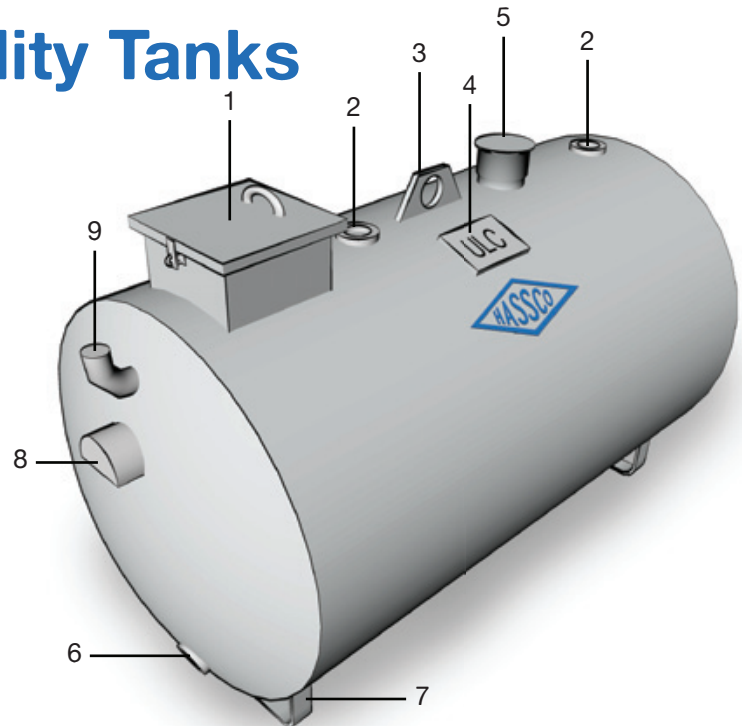

Material (gauge)	Capacity	Diameter	Length	Weight
14	450L (100gal)	30"	48"	250lbs.
14	1100L (250gal)	38"	60"	450lbs.
14	1360L (300gal)	38"	72"	900lbs.
12	2200L (500gal)	50"	72"	1100lbs.
12	4500L (1000gal)	50"	144"	2200lbs.

General Information

HASSCO's double wall tanks are an industry proven, cost effective way to store various fresh fuels. Best suited for farm and construction applications, these tanks come with 4 threaded openings, a fill cap, emergency/normal venting and a lockable spill-box incorporated into the design of the tank. Our double wall tanks come standard with a 340 degree wrap and is continually monitored by a vacuum gauge installed into the head of the tank. All HASSCO tanks come with our standard coating beginning with epoxy primer and 2 coats of enamel finish in a colour of your choice!

Options

- Tank gauges, alarms, heaters and pumping systems
- Premium Coating
- Interior linings
- Available in a variety of sizes and configurations

Sizing

- 450L - 4,500L (100 - 1,000IG)

Conformity

- ULC

